

App. F. IX-4

Previous References

1938.

(Muz)

Muz File

File No. 431-2

Serial Nos. 6-14

Later References

100-58-32 1-15

General and Revenue Secretariat.

Serial Nos. 7

Part B for

Case 3

SUBJECT.

Removal of Halebid temple
and other temples

REPLY

(To be written on this margin.)

m 174
10-563

OFFICE OF THE
FIRST MEMBER OF COUNCIL.

NOTE.

Dated...26th...September...19 29.
(Camp) Bhadravathi.

I am not sure if in the Order re-
garding the renovation of the Halebid
temple we have asked for any periodical
reports to keep us informed of the pro-
gress made in the execution of the several
measures of renovation. If not, let us
request the Chief Engineer to arrange to
send us quarterly reports of the work
done. The report for the first quarter
calculated from the date of Order may be
required to be sent as soon as it is due.

Financial Secretary (Muz.)
with compliments.

mult
26/8/29
2 copies of report
messary 28/8/29

³
A copy of Memo 2775-27/
Muzrai 431-28-2 dated
the 20th June 1929
re renovation of
the temple at Halebid
is submitted for
reference. Sd/-
of memo

Serial
No.

reports have not been
prescribed in it. The first
quarterly report falls due
on or after 30th Sept.
4 to 6 call for the
report is submission
for audit

25/11/29
20/9

20/11/29
1/10

20. The Chief Engr
Q. 40771 of 4-10 29
Institutes ref: to this office no 2775
77 of 20-6-29.
PTD

Us written on this margin.)

NOV 1929
19.751
MUZRAI.

OFFICE OF THE
FIRST MEMBER OF COUNCIL.

NOTE.

Camp Bhadravati 5th Novr. 1929
Dated.....

M 217

I remember to have asked for progress reports of the renovation works of the Halebid Temple. I do not, however, remember of having seen any of these reports. If any report is overdue, please obtain it and send it to me. I wish to be assured that the work is receiving attention.

Financial(Muzrai) Secretary
with compliments.

Immediate-

8 The Dewan's minute re
arranging the worship in
the temple that he had
to the members for info.
I presume a report
has been called for
from the temple.

6/11

In this office letter no 721/22
431-28 dated the 4th Dec 1929
the Chief Engineer of Mysore was
requested to forward quarterly
progress reports about the
execution of works of repair &
renovation to the temple at Hale

Serial
No.

the first report, namely, that for the period ending 30th Sept 1929 is still awaited. Sd for orders with a dft provided

11 Re orders of the Financial Secretary at para 8 of the notes supra, it is noted that a report has been called for from the Munzrai Comm. about ~~providing~~ providing puja in the Halebaid Temple, and the file on the subject is under submission to the Joint Members of Council for perusal of the Deewan's Memoir of the section under thereon

C.B.

7/10/29

Wm
7/11

Wm
7/11

2 minor memos is chief E. J. J. J.

no 932 dated 7th Nov 1929

12 Issued and regarded as done at para 11 of the notes supra.

C.B.

7/11/29

Wm
8/11

21 Secy)

1/3/29 member

Wm
5/11
1/2
3/11

5641
8/11

5751
11/11

FIR
13 NOV 1929
No. 2859

Gm. A

Serial
No.

2

Letter no 7621 dated the 17th
Decr 1929 from the ^{Chief} ~~Manager~~
~~Board~~ in response forwarding
a report on the progress
made in the execution of
repairs re to the Halcid
temple during the quarter
ended 30th Sept 1929.

Cb,

28/12/25.

2/12

187 Members

15 June

22

143

Wm. J. Hall - 22

1 DEC 1929
No. 3717

Sus A
 Co.
 24/2

Serial
No.

8 Letter No 12062 dated the 2nd
April 1930 from the Chief
Engineer of Mysore forwarding
a copy of the progress report
on works executed to the
Sri Hoysaleswara temple
at Halebid during the
quarter ended 31st March 1930.
168 pages for forwarding

6076
Gms A
12/4

180 Number) $\frac{78}{874}$

4/4


17 June 11 4 30 h

9 D O Letter No 199 dated the 1st
August 1930 from the Chief
Engineer of Mysore forward-
ing the progress reports on
works executed to the Sri
Hoysaleswara temple at
Halebid during the quarter
ending 31st March and 30
June 1930.

180 pages for forwarding

6/8/30 H. Secy) $\frac{153}{7.8.30}$


8 member) 4/3/30

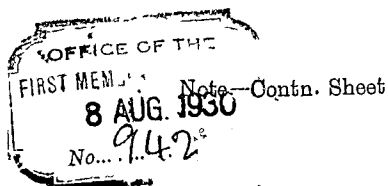

1/3
11.8.30

File No. 4131 of 1928.

Serial
No.



Letter No 1628 dated the 19th Nov 1930 from the Chief Engineer of Mysore forwarding for information the Inspector's report on works relating to the Sen Chumakernakarny and the Sri Horalemanakarni temples at Belur & Halebid during the quarter ending 30th Sept 1930.

20 Sd/- for General

Rb. 28/11/30. 1st Member) 13
21 Dec 29.11.30

15/12 ✓
13
16.12.30

P.T.O

Please place
the Belur report
the connected file
by 31-1-31

Reminded 5-2
31

Proper report for quarter
ending Dec 1930 placed
in the correspondence
particulars of the
works done at the
temples of Belur & Halebid

152

(550)

General and Revenue
Secretariat

File No

431

of 1928

App. E. III-2]

Serial
No.

Letter No 16097 dated the
12th May 1931 from the
Chief Engineer forwarding
the progress reports on the
renovation of the Belur
and Halebid temples.
22 sent for perusal. and
C.F. [initials]

15/5/31

First Member) 15
15.5.31

23 May

15
18.5.31

Letter No 3181 dated the
11th Sept 1931 from the
Chief Engineer of Mysore
forwarding a copy of the
progress report on the
work of renovation of
Sri H Viraleswara
temple at Halebid for
the quarter ending 30th
June 1931 and stating
that a similar report on
Belur temple would be
forwarded on [unclear]

24

File No.


431

of 1928

General and Revenue
Secretariat

Submitted for perusal
26 MSB
16/9/31
(2nd Member) 17.9.31

25/10
18/9



Sub B
21.9.31

Letter No 4278 dated the
6th Oct 1931 from the
Chief Engineer forwarding
for information a copy of
the progress report on
the work of renovation
and repairs of the
Sri Chennakesava

26 Submitted for perusal
26 MSB
9/10/31
(2nd Member)
~~13/10/31~~
8.10.31

13.10.31

1284.
MRS
Plan B
12th
13-10-31

SUBJECT

Diary No. of letter replied to.....563

General and Revenue Secretariat
(Muzrai)
the 192

Date of issue.....24/1/23

Section Muzrai

File No. 431-28

Serial No. R 6

No.

To

The Chief Engineer

of Mysore, Mysore

Signed by.....

Sir,

I am directed
to invite reference
to G.O. No. 2775-77
Muzrai 431-28-2
dated the 20th

List of enclosures.....

June 1922. I am
instructions along
the action to be
taken for the
preparation of

Copied by.....

Examined by.....

over

temple at Halibor,
 I am ~~pleased~~^{glad} to
 request you to be
 so good as forward
 for information
 quarterly reports
 about the progress
 made in the execution
 of the several measures
 of promotion referred
 to in the G.D. The
 first report may
 be

report for the
 period ending
 30th Sept 1929 may
 kindly be submitted
 at a very early
 date

I have &c

W. H. W.
 Director, to Govt
 C.C.

30/9/29

SUBJECT.....

Diary No. of letter replied to.....751.....

General and Revenue Secretariat
(Muz)
the 192

Date of issue.....

7/11/29

Signed by.....

Mr. T.K. Somaswamy

List of enclosures.....

Copied by.....

Examined by.....

Section *Muz*

File No. 431-28

Serial No.

No.

932

To

Dear Sir

I am desired to
invite reference to this
office letter no 771/Muz
431-28 dated the 4th Oct
1929 about the
of quarterly progress
reports in respect of the
execution of repairs &c
to the temples at *Itanad*,
and to request you to
be so good as to forward,
immediately, the report
for the quarter ended

over

30th requested 1929, as already
Yours sincerely
ms
7/11/29

To Rajaswarakta
John Shore Esqre Am & Co
Chief Engineer of Japan,
Bangalore

C.L.
7/11/29

ms
7/11

388

No. 762

18 DEC. 1929

Public Works Department,

Central Office,

14

ENC.

a ed, Bangalore, 17.12.1929

mr ce

99/15/1


FROM

Rajasevasakta

J. BHORE, Esq., A.M.I.C.E., ETC.,

Chief Engineer of Mysore,

Bangalore.



To

Muz 431-28-7

Rajaseva Parayana

B.Srinivasa Iyengar, Esq., B.A., B.L.,

Financial Secretary to the Government of Mysore,
Bangalore.

Sir,

With reference to your letter No.771/Muz.431-28 dated the 4th October 1929 and subsequent reminder thereto, regarding the -- renovation of the temple at Halobid, I have the honour to forward herewith, for information, a copy of letter No.695 dated the 5th December 1929, received from the Superintending Engineer, Shimoga Circle, furnishing particulars about the progress made in the execution of the work referred to during the quarter ended 30th September 1929.

I have the honour to be,

Sir,

Your most obedient servant.

J. Bhore

16.12.29
CHIEF ENGINEER OF MYSORE.

T.R.S

Letter No.695 dated the 5th December 1929 from the Superintending Engineer, Shimoga Circle, to the Chief Engineer of Mysore.


Subject:- Halebid temple.

With reference to your Nos.5829 and 381 dated the 9th and 15th November 1929 respectively on the subject of repairs done in the above temple during the quarter ended 30th September 1929, ---- I have the honour to state as follows as reported by the Executive Engineer, Hassan Division:-

- (a) The special establishment employed actually commenced their work from 1st September 1929.
- (b) The front portion of Sree Chakra, which was out of plumb, was reset and cement pointed.
- (c) The front steps towards North were reset.
- (d) The grass within the compound was cut and the two pavilions on either side of the steps were cement pointed as well as foot-paths formed round the Sree Chakra.
- (e) The flooring inside Garbhagudi was removed and reset and cement pointed.

The Executive Engineer is instructed that substantial work under repairs should be done in the current quarter.

"Copy"


Chief Engineer of Mysore.

T.R.S.

Public Works Department,

Central Office,

No. 12062

ENC.

W Dated, Bangalore, 2 April 1930
M

FROM Rajasevasakta

J. BHORE, Esq., A.M.I.C.E., ETC.,

Chief Engineer of Mysore,

Bangalore.

4-4-1930
1612

To

Rajaseveparayana,

B. Srinivasalingar, Esq., B.A., B.L.,

Financial Secretary to Government,

B a n g a l o r e

Sir,

With reference to your letter no. 1802/Wuz. 431-28 dated the 25th February 1930, I have the honour to forward herewith a copy of the progress report on works executed in Hoyasaleswaraswari Temple at Halebid for the quarter ended 31st December 1929.

I have the honour to be,

Sir,

Your most obedient servant,

J. B. Bore
Chief Engineer of Mysore.

V.M.S.

Progress Report of work done in Halebid Hoyasalaeswareswami
Temple for the quarter ended 31st December 1929.

- (1) Cement pointing.- The basement of Sri Chakra towards Northern and western side 29.05 squares with cement after packing up the intercrevices with small jelly in cement.
- (2) Levelling the mound on the eastern side of Pasavannana Mantap to 40' x 20' (rear portion).
- (3) Minor repairs to the bases of two pillars inside at the entrance with cornice work in cement.
- (4) Cutting the sill piece of northern side door way and fixing it with a neatly cut stone leaving a small hole $1\frac{1}{4}' \times \frac{1}{4}'$.
- (5) Dressing soap stones to sizes and fixing on the top course of steps at the entrance of doorway $2\frac{1}{2}' \times 1'$.
- (6) Building up wall with cut stone (soap) work behind earlike pavilions in front lower portions.
- (7) Filling in concrete inside the ear-like pavilions on both sides of northern door way and cement plastering.

Attended to the zinc mouldings of pillars &c., to two ear-like pavilions in front.

(Sd) N. Vrishnalingar,
Executive Engineer,
Masonry Division.

"c o p y"

M. B. Rao 1.24.30

Chief Engineer of Mysore

[Signature]

No. 199



Enc 2 Progress Reports

PUBLIC WORKS SECRETARIAT,

Dated, Bangalore, 1st August

May 431-28-9



Dear Sir,

With reference to your D.O. letter No. 37/Mu:

dated the 8th July 1930, I forward herewith the progress reports on works executed to Sri Hoyasaleswara Temple at Halebid for the quarters ending 31st March 1930 and 30th June 1930.

Yours sincerely,

Rajasevaparayana

Rajasevaparayana

B. Srinivasalingar, Esq., B.A., B.L.,

Financial Secretary to Government.

acc to Sri. Housale's word temple

1st January 30 to 31st March 1930

Schedule of Work

Me

James Scott

1

W. L. G.

Pr. 17

3

st

1) Cement bonding work done to Basement
after filling in the interstices with
gelly in Cement. Western side Basement

Patcher
Southern side

Shefs

Eastern side

Total

2) Removing & refixing rough stones and cement bonding the srs-chakra of the main temple

— 2nd

3) Repairs to car like nitches, in front
with necessary finials in cement.
of 3x1 with octagonal carvings

4) Scraping grass around the fireplace making foot path.

5) Removing all the thorny shrubs inside the compound

Issued Cement bags 14.

outlay under establishment charges (non-recurring)

As per Estimated notes

2417/30

R - Lip, 7000

So) J.S. Srinivasulu

S. FRINTENDING ENGINEER.

SHIMOGA CIRCLE

terly progress report of works done in Sri Hoisaleswaraswamy Temple at Halebeed from 1-4-50 to 30-6-50.

Details of work	No.	Dimensions	Contents	Total	Rate	Cost
		L. B. D.				
1. Cement pointing the main temple on the eastern side. — Floor.	1	45 10 -	450			
					4.50 sqr 5/-	20
2. Cement pointing the screen wall inside the main temple, packing up the joints with brick bats in cement- Hoisaleswara temple	1	18 1/2 - 9 1/2	250			
Screen wall	1	19 1/2 - 5	98			
Flooring	1	7 1/2 - 1	7 1/2			
	1	13 1/2 - 7	94 1/2			
Wall —	1	14 1/2 - 5 1/2	108			
Pillars alround	1	15 - 5 1/2	82			
Santeswari temple. Top beam	1	10 1/2 - 5	52 1/2			
Slab- above door	3	7 1/4 - 2 3/4	60			
-do-	1	16 - 2	32			
Pillars alround	1	3 1/2 - 16	56			
	1	13 - 5	65			
Flooring	4	3 - 2	24			
Basement	1	10 - 5 1/2	55			
	1	4 - 2	8			
Pillars alround	1	16 - 5 1/2	88			
-do-	1	18 1/2 - 4 1/4	88			
Horizontal beams- Hoisaleswara Temple	1	3 1/2 - 2 3/4	9			
	1	6 1/2 - 1	6 1/2			
	1	12 - 5 1/2	66			
	1	13 - 12	156			
	1	22 1/2 - 7 1/2	169			
	1	50 - 11	550			
	1	18 - 7	126			
Santeswari temple	1	18 - 8	144			
	1	7 - 3	21			
	1	12 - 5	60			
Total			2476		24.76 sqr 8/-	198
3. Cement pointing the thin joints of car with niches in front-alround	1	11 2 -	22			
In front of big Nandi	1	av: 9 1 1/2 -	13 1/2			
-do-	1	21 19 -	399			
Total			554		5.54 sqr 10/-	55
4. Dressing a new stone for the edge of of Srichakra on the eastern side filling in with cement concrete & pointing	1	4 1/2 3 -	13 1/2			
A new stone flooring in front of the main entrance	1	13 4 3/4 -	62			
Total			75 1/2		75 1/2 sqr 1 1/8/-	118
5. Removing six ~~small~~ ^{large} trees above small Nandi Temple and cement grouting the holes	6		6		6 each 2 1/-	12
6. Preparing a new stone to Srichakra and fixing with jelly packing below	1	14 3 -	42		42 sq ft 3 cs	8
7. Packing the crevices below pillars and cement plastering the portion	1	3	3			
	2	8	16			
Total			19		19 sq ft 6 cs	7
8. Dressing a new soap stone for the threshold of Sri Hoisaleswara temple	1	4 1/2 2 -	9		9 sq ft 2 1/-	18
9. Removing the grass around the temple and making a foot path	1	100 6	600		70 sq yd 6 cs	20
10. Dressing new stones in place of missed ones and fixing them with cement	1	2 1 -	2			
	1	2 1 1/2 -	2 1/2			
	1	1 1/2 1 -	1 1/2			
Total	1	1 1/2 -	6		6 sq ft 1 1/2	0
11. Removing the lime wash covered over the Dwarapalakas fully carved images in front of the Hoisaleswara temple	2		2		2 each 10	
Total rupees						100
Under non-recurring charges						
Establishment charges			Rs. 312-0-0			
Materials used			Rs. 57-0-0			
Total			Rs. 369-0-0			

under recurring charges
Pay of watchmen for three months Rs.48-0-0

" C o p y "

B. H. S. S. S.
+ Executive Engineer 4/7

Hassan Division.

k.s.

Curran
24/7/30

SUPERINTENDING ENGINEER,
SHIMOGA CIRCLE

249-29-9

Public Works Department,

Central Office,


No. 4410

ENC.

1 Report

Dated, Bangalore, 6 10 1930.

(22)




FROM M.G. Rangaiya, Esq., B.A., B.E., M.R. San. I., M. Am. A.E.,
~~J. B. H. O. M. Esq., A.M.C.E., Etc.~~

Ag. Chief Engineer of Mysore,
Bangalore.

504
mum

To

Rajaseva Parayana



B. Srinivasa Iyengar, Esq., B.A., B.L.,

Financial Secretary to Government,

Bangalore.

Ug 431-28-10

Sir,

PROGRESS REPORT ON WORKS OF BELUR TEMPLE.

With reference to Government Order No. 2796-9/Muz.

249-29-4 dated the 6th June 1930, I have the honour to forward herewith, for information, the progress report of works done in Sri Chennakesavaswami temple at Belur for the quarter ended 30th June 1930.

Submitted for perusal
WSK
2/10/30

H. Secy)

13.10.30

I have the honour to be,

Sir,

Your most obedient servant,

1st Member)

14.10.30.

K. M. N. 27/30

FOR CHIEF ENGINEER OF MYSO. E.

N. J. P.

23.10.30

24.10.30

24.10.30

Progress report of works done in Srichennakesavaswamy Temple at
Belur from 1-4-30 to 30-6-30.

Details of work	No.	Dimensions.			Contents	Total	Rate	Cost
		L.	F.	D.				
1. Removing and resetting the floor 1.	20	7	-	-	161			
ingalround Srichakra below base-	1	5 $\frac{1}{2}$	7	-	37			
ment with sand below	1	22 $\frac{1}{2}$	4	-	90			
From main steps towards Srikrananal	1	7 $\frac{1}{2}$	8	-	60			
bagil	1	20	4 $\frac{1}{2}$	-	90			
	1	14 $\frac{1}{2}$	6	-	87			
* $1 \times 19\frac{1}{2} \times 4 = 78$	1	9	5 $\frac{1}{2}$	-	49 $\frac{1}{2}$			
$1 \times 10 \times 5\frac{1}{2} = 55$	1	19	7	-	133			
	1	26	10	-	260			
-do- towards Swarg bagil	1	18	4	-	72			
	1	14 $\frac{1}{2}$	4	-	58			
	1	20	4	-	80			
	1	14	4	-	56			
	1	20	4	-	80			
	1	14 $\frac{1}{2}$	4	-	58			
	1	12	4	-	48			
	1	5	3	-	15			
	1	11	4	-	44			
	1	23	3	-	69			
	1	7	4	-	28			
Towards western side from -do-	1	7	5	-	35			
	1	15	9 $\frac{1}{2}$	-	146			
	1	10 $\frac{1}{2}$	14 $\frac{1}{2}$	-	220			
	1	14	12	-	168			
Total					2277			
2. Cement pointing to flooring with	1	9	3	-	27			
jelly filling etc	1	19	3	-	57			
	1	10	5	-	50			
	1	19	3	-	57			
	1	26	3	-	163			
Total					559			
3. Cement pointing inside the main temple with brick bats packing to pillar joints etc								
North & South walls	2	79	-	7 $\frac{1}{2}$ 2/3	1212			
East & west walls	2	58	-	7 $\frac{1}{2}$ 2/3	582			
Flooring below N & S	2	79	-	11	1738			
-do- " E & W	2	58	-	11	356			
Adjacent to Suknasi door	2	12 $\frac{1}{2}$	-	12 $\frac{1}{2}$	512			
Ranga mantap	1	18	-	18	524			
Pillars below	4	13	-	$\frac{1}{2}$	13			
Towards west of Swargadabagil	1	45	-	7	515			
Steps	1	12	-	11 $\frac{1}{2}$	141			
Nitches top and bottom	4	10	5	-	200			
Towards East of Swargadabagil	1	140	-	7	980			
Nitches	4	10	-	5	200			
Steps	1	10	-	12	120			
Total					6960			
4. Removing the lime wash inside - the main temple on the raised base ment of screen walls	1	79	-	7 $\frac{1}{2}$ 2/3	600			
	1	58	-	7 $\frac{1}{2}$ 2/3	291			
	1	79	-	11	369			
Total					1766			
5. Removing the mantap attached to the main temple Srinarasimhaswamy temple	1	14	10	15 $\frac{1}{2}$	2170			
Deduct for hollow portion					1170			
Approximate balance					1000			
Total work done					1000			

22.77 Rs 15/- 342

5.59 Rs 5/- 18

69.60 Rs 8/- 557

17.66 Rs 1/- 13

Work done by sculptor

1. Prepared a new stone for prabhavali to Ganesa image, chiseling of the unsized image of Ganesa and completing everything newly in April & May

2. Carving the ten incarnations of -
Sri Vishnu on Prabhavali and the two
images at the bottom by the side in May

3. Removing the thick coat of oil etc
by chisels above Sri Narasimhaswamy -
image and dressing the whole figure in June

Lump sum

4. -do- -do- of Sri Varahaswamy image -do-

-do-

5. Preparing Koralu Male in soap stone
for Sri Narasimhaswamy 1½ feet -do-

-do-

6. Preparing the side panels in soap
stone for the Hanuman image temple -do-

-do-

7. Dressing the slabs wherever required
in resetting the flooring around Sri-
Anakr -do-

-do- 5

Total work done..... 225

Grand Total Rupees. 1191

Non-recurring grant. of Rs. 2,000

Disbursement charges from 1-4-30

to 30-6-30..... .. Rs. 391-8-0

Cost of materials issued Rs. 44-0-0

Total Rs. 435-8-0

Recurring grant spent Rs. 36/- salary of watchman only.

" C o p y "

B. Narasimha Rao
Executive Engineer, (A)
Hassan Division.

C. S. Rao
24/7/30
SUPERINTENDING ENGINEER
SHIMOGA CIRCLE

No: 12930

ENC. 2

Mej 421-28-11

Public Works Department,
Central Office,

Dated, Bangalore, 23rd February 1931.

28
6122
DMD 1164
8/24/2/31

24 FEB 1931
No 89.

FROM

J. B. HORE, Esq., M. D. C. E.,

The Chief Engineer of Mysore,
Bangalore.

23 FEB 1931

To

The Financial Secretary to Government,

B a n g a l o r e

Sir,

I have the honour to forward herewith the Progress Report
on Belur and Halebid temples for the quarter ending 31st December
1930.

I have the honour to be,

sir

Your most obedient servant,

18/2 member) 24/2/31

W. H. H. 2/31

For Chief Engineer of Mysore.

8/6

mm 24-2-31

Sus B (25-4-31)
28-2-31

From

THE CHIEF ENGINEER OF MYSORE,
BANGALORE.

No 7628

Dated

19.11.30

To

The Secretary to Government,
Law Department,
Bangalore.

Progress reports on works relating to Sri Chenna-
keswaraswamy and Sri Hoisaleswara Temple
at Belur and Halebid.



Sir,

With reference to this office D.O. letter No. 335 dated
the 11th November 1930, I have the honour to forward herewith
for your information, the progress reports on works relating
to the above two temples for the quarter ended 30th September
1930.

I have the honour to be

Sir,

Your most obedient servant,

K. J. 18 11/30

TSRN.

For Chief Engineer of Mysore.

Emancipate Qly Per Rock Cost

1) Remaining & reflooring the slabs in	1	34	2	+	-	71
Kalyana mantab with sand below	1	25	17	-	-	9
Bottom portion	1	16	4	-	-	64
raised bit						
outside water spout						
						14.07
2) Constructing Burnt Brick in mud w						
seat below slab	1	9 $\frac{1}{2}$	1 $\frac{1}{4}$	1		12
- do - for Elephants	2	2	2	2		16
	1	9 $\frac{1}{2}$	1 $\frac{1}{4}$	1		1
	2	4	4	1		32
Total						72
						all - 3
3) Cement plastering						
Seat around	1	31	1	-		31
- do -	2	6	2	-		24
Total						55
						55
						Sq - 15
4) Cement pointing the floor - filling						
jelly by the sides of pillars with	1	34	27	+	24	718
Cement	1	2	17			425
Total						1343
Deduct for seat	1	7 $\frac{1}{2}$	6	-		62
(B)						1281
Compound flooring Saver side	1	19 $\frac{1}{2}$	6	-		117
	1	7 $\frac{1}{2}$	4 $\frac{1}{4}$	-		32
	1	14 $\frac{1}{2}$	3 $\frac{1}{2}$	-		51
	1	11 $\frac{1}{2}$	4	-		46
	1	17 $\frac{1}{2}$	4	-		76
Inside Sugrawa temple	1	6	6	-		36
Wall - do	1	8	7	-		16
Steps	2	6	2 $\frac{1}{2}$	-		30
	1	8 $\frac{1}{2}$	2 $\frac{1}{2}$	-		21
	1	16	4	-		64
from Sukrawarabagel	1	24	5	-		110
	1	7 $\frac{1}{2}$	5	-		28
	1	7 $\frac{1}{2}$	4	-		14
	1	7 $\frac{1}{2}$	4	-		38
	1	18	4 $\frac{1}{2}$	-		81
	1	14	4 $\frac{1}{2}$	-		63

Right side	1	5 1/2	5 1/2		
do	1	32	7	-	2
Laying concrete below seat.	1	12	1 1/4	-	15
	1	7 1/2	7	-	52
	1	9 1/2	9 1/2	-	90
Sides of band (Small)	1	18 1/2	10 1/2	-	194
	1	6 1/2	4	-	26
	1	5 1/2	3 1/2	-	19
	1	7 1/2	3	-	23
	1	6 1/2	2	-	13
	1	6	3	-	18
	1	2 1/2	6	-	15

corner -

1 10 1/2 5 1/2 - 58

1 8 4 1/2 - 36

1 8 3 - 15

1 9 1/4 5 - 46

1 3 1/2 5 - 18

Niche opposite to Venkateswara Temple

Pond inside.

1 15 5 1/2 - 82

Left of Svargadubazal

1 18 5 - 90

1 23 5 - 115

1 10 5 - 50

1 50 5 - 250

1 28 1/2 5 - 143

Total

3882

for fencing

1 3 5 - 1

Balance

867
x 38.6

5--

5) Removing & reflooring the slabs of
lower side i.e. front wall

1 5 3 - 15

1 7 1/2 5 - 37 1/2

1 7 1/2 7 - 67 1/2

1 11 1/2 16 - 184

1 10 1/2 9 1/2 - 99

1 17 12 - 204

1 12 4 - 48

1 10 1/2 3 - 31

Total

586

5-86

15

6) Removing the lime wash

. Arimannavar Temple - Pillars

2 2 1/2 - 7 3/4 38 3/4

2 2 1/2 - 6 1/4 31 1/4

70

Bf						70				
Ammanavaram Temple - Pillars		2	3	-	6	36				
		2	5 1/2	-	8 1/4	71				
		2	4 1/4	-	2 1/2	21				
Images fixed in wall		2	5 1/2	-	4	44				
Kalyana Mantab - Pillars		4	5 1/2	-	8 1/2	187				
		2	50	-	5	100				
Total						549				
						549	Sqm	3	-	16
7) Fixing skin, wall across the pillars in Kalyana Mantab to prevent water in cement		1	14	1 1/2	1 1/4	26 1/4	cft	-	6	10
8) Dismantling the mud wall of Nagara - Khana and throwing the debris						~~Rs 15~~ 15				30
9) Removing the stone pillars - slabs & got by dismantling Sri Varasimha - swamy temple										20
10) Dismantling the top mud wall and concrete bed in front of Amma - nagara temple		1	10 1/2	10 1/2	2	220				
		2	10 1/2	1 1/2	1	32				
		2	7 1/2	1 1/2	1 1/2	34				
Total						286	cft	-	6	9
11) Burnt Brick in Cement Laying above the slabs		1	10 1/2	10 1/2	1 1/2	83	cft	-	1	62
12) Constructing Parapet wall in mud with old bricks - Parapet Pillars		4x2	3	7 1/2	2 1/2	35				
		4	1 1/8	1 1/8	2 1/2	13				
Total						48	cft	-	2	6
13) Coping and arch work in Cement		1	46			46	cft	-	4	12
14) Resetting Sri Chakra to its proposed original shape with stones available and dressing new stones required		1	24	12	-	288				
						288	Sqm	30	-	84
15) Removing and reflooring with old slabs over sand bed over Sri Chakra.		1	38	12		456				
						456	Sqm	15	-	67

Scripture Work:-

- 1) Carving the damaged and broken parts of Madhava murti
- 2) Fixing pillars to Ganesha image both sides - -
- 3) Preparing and carving the broken parts of Bhairava image ----- 75
- 4) Preparing & dressing the pillars of Bhairava image ----- 2.
- 5) Dressing huge stones in Kalyana Mantab - ----- 20
- 6) Preparing and fixing the broken parts faceri of Sri Bana Shankari image ----- 75
- 7) Dressing stones to remodel Sri Chakra - -
dismantled for the sizes and shapes required - for basement } 15

Total Rupees 1095

Recurring
Watchman's pay $3 \times 12 = 36-0-0$

Non-recurring
Establishment 405-0-0
14 Cement bags @ 4/100 64-12-0
Sand 3-0-0

Checked & found correct on 30.10.30 Total 508-0-0

SD) R. Madhavan
20/10/30
Sub Divisional Officer
No 3 Sub Div. of Order

SD) J.S. Sreenivasamurthy
Sub Overseer

"Copy"

M. K. Srinivasan
Executive Engineer, 3/11/30
Hassan Division.

2-11-30

87/11/30

SUPERINTENDING ENGINEER,
SHIMOGA CIRCLE

out by the Est. Pl. Shment
 of Sri Hoisaleswara swamy temple at H
 ending 30th September 1930 3,

Particulars	Dimensions			Qty	Per	Rate	Cost
Remains & reselling platform	to broken slope						
Left side of entrance	1	15½	8	-	124		
do	1	13½	12	-	162		
do	1	10	8	-	80		
Front of main entrance	1	18	10	-	180		
Steps	1	17	4	-	68		
Right side of main entrance	1	12	11½	-	138		
do	1	10½	8	-	84		
do	1	21½	11	-	236		
do	1	10	10½	-	105		
In front of Small Nandi mantab	1	22	18	-	396		
do	1	8	7½	-	60		
do	1	6½	4½	-	29		
Inside temple in niches	2	3	3	-	18		
Total					1680	Sh	- 4 - 420
Cement pointing including packing the joints							
Platform-left of entrance	1	15½	8	-	124		
do	1	13½	12	-	162		
do	1	10	8	-	80		
do	1	18	10	-	180		
Steps	1	17	6	-	102		
Right side of main entrance	1	10½	8	-	84		
do	1	12	11½	-	138		
Interior (Ranga mantab in)	1	13½	12	-	162		
Front of Amman Temple	2	3	3	-	18		
Niches							
Screen wall in front of do	1	17½	1½	-	25		
Top of platform	1	14½	6	-	87		
do	1	17½	5	-	87		
do	1	10½	5	-	52		
Platform in front of	1	11	5	-	55		
do	1	13	5	-	65		
C.O					1421		

Top of platform	do	1	45	1 $\frac{1}{2}$		
do		1	14	1 $\frac{1}{2}$		
do		1	21	1 $\frac{1}{2}$	-	31
Basement of platform		1	14	5 $\frac{1}{2}$	-	77
do		1	15	5 $\frac{1}{2}$	-	8
do		1	6	5 $\frac{1}{2}$	-	33
Wall of do front face		1	50	4	-	200
do		1	8 $\frac{1}{2}$	4	-	34
do		1	18	4	-	72
Total						20.3

58 - 16

3) Dressing Stone slabs on top of stairs

Platform of entrance	1	8 $\frac{1}{2}$	7	-	59
do	1	18	10	-	180
do	1	4	1 $\frac{1}{2}$	-	6
do	1	6	2 $\frac{1}{2}$	-	15
do	1	5	2 $\frac{1}{2}$	-	1
do	2	2	1 $\frac{1}{2}$	-	6
In front of Small Mandi	1	8	5	-	40
do	1	3	2	-	6
do	1	5	4	-	20
do	1	10	5	-	50
do	1	7	7	-	49
do	1	5	1 $\frac{1}{2}$	-	7
Total					450 S

4) New stones carried from the can found over the platform

Front steps 2 pieces	1	17	1 $\frac{3}{4}$	1	29
do	1	3 $\frac{1}{2}$	1 $\frac{1}{4}$	1	5
Front steps	1	2 $\frac{1}{2}$	1 $\frac{1}{2}$	1	4
For platform	1	4 $\frac{1}{2}$	2	$\frac{3}{4}$	7
Main threshold	1	5 $\frac{1}{2}$	1 $\frac{1}{2}$	$\frac{1}{2}$	5
Platform	1	4	1 $\frac{1}{2}$	1	6
do	1	3 $\frac{3}{4}$	2	1	8
do	1	2	2	1	4
do	1	2	1 $\frac{1}{2}$	1	3
do	1	3	1 $\frac{1}{2}$		3
					74

588

1	$3\frac{1}{2}$	$2\frac{1}{2}$	$\frac{3}{4}$	6
---	----------------	----------------	---------------	---

1	2	$2\frac{1}{2}$	1	5
---	---	----------------	---	---

1	2	$1\frac{1}{2}$	$\frac{1}{2}$	2
---	---	----------------	---------------	---

1	$2\frac{1}{2}$	$1\frac{1}{4}$	$\frac{3}{4}$	2
---	----------------	----------------	---------------	---

1	$2\frac{3}{4}$	2	$\frac{3}{4}$	4
---	----------------	---	---------------	---

1	2	$1\frac{1}{2}$	$\frac{3}{4}$	2
---	---	----------------	---------------	---

1	2	2	$\frac{3}{4}$	3
---	---	---	---------------	---

1	$2\frac{1}{2}$	$1\frac{1}{4}$	$\frac{1}{2}$	2
---	----------------	----------------	---------------	---

1	$3\frac{1}{4}$	$1\frac{1}{4}$	$\frac{3}{4}$	3
---	----------------	----------------	---------------	---

1	3	$1\frac{1}{2}$	$\frac{3}{4}$	3
---	---	----------------	---------------	---

1	$2\frac{3}{4}$	$1\frac{1}{2}$	$\frac{3}{4}$	3
---	----------------	----------------	---------------	---

1	$3\frac{3}{4}$	$1\frac{3}{4}$	$\frac{1}{2}$	3
---	----------------	----------------	---------------	---

2	3	$2\frac{1}{2}$	$\frac{1}{2}$	8
---	---	----------------	---------------	---

1	2	2½	1	5
---	---	----	---	---

4	3	$1\frac{1}{2}$	$\frac{1}{2}$	9
---	---	----------------	---------------	---

134 Cfl - 2 - 17

Floor of passage of main entrance	13 $\frac{1}{2}$	7 $\frac{1}{4}$	4"	33 cft	1	8	50
-----------------------------------	------------------	-----------------	----	--------	---	---	----

21	13 $\frac{1}{2}$	7 $\frac{1}{4}$	4"	33	cl	1	8-	50
----	------------------	-----------------	----	----	----	---	----	----

1	21	8	5	850
---	----	---	---	-----

1	20	14	4	1120
---	----	----	---	------

1960

or 72 cys - 4 - 18

about	6	cars	-	6	-	2
-------	---	------	---	---	---	---

1	16	3	1	48
---	----	---	---	----

1	14	3	1	42
---	----	---	---	----

1	10	3	$\frac{3}{4}$	27
---	----	---	---------------	----

1	14	3	1	42
---	----	---	---	----

1	9	3	1	27
---	---	---	---	----

1	8	3	$1\frac{1}{2}$	36
---	---	---	----------------	----

1	7	5	$1\frac{1}{2}$	52
---	---	---	----------------	----

1	8	5	1½	60
---	---	---	----	----

34

115

on 13 cy

QES 678

Q 4/81 - per bag

27-0-0

Establishment Charges

240-0-0-0

34-0-0

18-0-0

42-0-0

361-0-0

361

Turned out

by

Sd/- R Madhavan

30/10/30
Sub Division official
No 2 Sub Division

W. L. Linnard
Executive Engineer,
Hassan Division, 3/11/30.

Hassan Division.

27/11/30

Case closed
7/11/78

SUPERINTENDING ENGINEER.
SHIMOGA CIRCLE.

No. 16697
Encl. 2

Wice

CENL

1522

PUBLIC WORKS DEPARTMENT,

CENTRAL OFFICE,

Bangalore,

May 4 31-28-13

FROM M.G. Rangaiya, Esq., B.A., B.E., M.R. San. I., M. Am. A. E.,
~~Chief Engineer of Mysore, Bangalore.~~

Chief Engineer of Mysore,

Bangalore. 13 MAY 1931

To

Rajasevapurayana

B. Srinivasa Iyengar, Esq., B.A., B.L.,

Financial Secretary to the Govt., of Mysore,

B a n g a l o r e

Subject:- Renovation of Belur and Halebid temples.

Sir,

I have the honour to forward herewith, for information, the Progress Reports on the works relating to the above two temples for the quarter ended 31st March 1931, received from the Superintending Engineer, Shimoga Circle.

I have the honour to be,
Sir,
Your most obedient servant,

K. Srinivas 5/31

For Chief Engineer of Mysore.

T. R. S.

secured from the Special Establishment employed
in the Sri Chennakesava swamy temple at
the 3rd March 31

Description of Work		Dimensions				Rate		Cost	
Resetting flooring									
Front of Kaffeldhennigayya temple	1	31 1/4	7+6	-	23 1/2				
	1	14	5	-	70				
	1	12	11	-	13				
Sides of do	1	9	12	-	108				
	1	12	5	-	60				
	1	21	9	-	189				
Front of Annamavara temple	1	43	15	-	645				
Sides of do	1	30	10	-	300				
do	1	57	18+14	-	91				
					2650				
Deduct for work done in the									
Front of Kaffeldhennigayya temple	1	31 1/4	6 3/4	-	211				
(as measured in page 6)					450				
Work done between 15-12-30 to 31-12-30	1		28	-	661				
					19.89 Sq	19.89	10	-	199
Resetting flooring with stones									
Front of Valana mantap.	1	1	11	-	19				
do	1	10	8	-	84				
do	1	24	18	-	43				
					7.14	7.14	12	-	86
3) Cement binding									
Front of Kaffeldhennigayya temple	1	31 1/4	7+6	-	23 1/2				
	1	14	5	-	70				
	1	12	11	-	132				
Sides of do	1	9	12	-	108				
	1	12	5	-	60				
	1	21	9	-	189				
Front of Annamavara temple	1	43	9	-	108				
					7.01 Sq	7.01	5	-	45
Cement concrete with Cement									
Front of Kaffeldhennigayya temple	1	8	1 6"	-	4				
Sides of do	1	8	3/4 6"	-					

at junction of ich	the e								
around Kaffelchenniga	1	84	-	-	84	84			
6) Fine Cement pointing with	See	in							
Image wall on NW of	1	25	-	18'	450	4.50	6	-	
main temple outside									
7) Repairing the fine cornice in stone pillars in									
In the carlike mantab	3	-	-	-	3	no	3	2	-
8) Removing Earth & debris									
Front of Vahana Mantab	1	18	10	3	540	540	20	-	4
9) Constructing Paraph Wall on four pillars in front of									
Sukravarada Bagel									
Firm masonry & removing	1	38	$\frac{3}{4}$	3	86	86	-	-	6
all parapet									
Point Brick in chumnam with scaffolding charges									
Musculent	1	38	$1\frac{1}{2}$	$\frac{1}{2}$	28	28			
Substructure	1	38	1	2	76	76			
Total					104	104	-	6	-
Filling the roof in chumnam	1	8	$\frac{1}{4}$	$\frac{1}{2}$	34	34	-	5	-
cornice work on other face	12	-	-	-	96	96	-	6	-
cornice with plastering on	4	13	$\frac{1}{2}$	-	54	54	-	8	-
chumnam plaster									
Inside around	1	33	-	2	66	66			
outside around	1	43	-	3	129	129			
Top of parapet	1	38	$1\frac{1}{4}$	-	48	48			
Top of roof	1	8	$\frac{1}{4}$	$\frac{1}{4}$	68	68			
Total					311	311	4	8	-
10) Sculptors works									
Carving the rough images on both sides of									
Sukravarada Bagel									
4 Female 1 male 1 female of horses									
face 1 Narasimha 1 Eswara									
1 Ganesha & one Lion = 10 figures					10	10	5	-	-
Pillars between the above	6				6	6	3	-	-
figures									
Carving flower & cornice in									
the base stone for the									
front of Vahana Mantab	2	12	$\frac{3}{4}$	$1\frac{1}{4}$	32	32	1	8	-
Work in chumnam Vigraha									
(in finished)					1	1	25	-	-

total progress secured

Establishment charges for January	132-6-0
<u>do</u> February	144-0-0
<u>do</u> March	135-0-0

Total carried forward 411-6-0

Cost of materials paid for

4 Cement bags @ 4-10-0 per bag	18-8-0
3 mells of Chunnam mortar @ 5-0-0 each	40-0-0
4 carts of sand @ 0-8-0 each	2-0-0
750 Burnt Bricks @ 10 per 1000	7-8-0
16 Seers of lime @ 0-0-6 per seer	0-8-0
2 mells of Chunnam mortar still to be paid	10-0-0

Actual expenditure incurred 490/-/-

Sd/ Q Madhava
17/4/31
Assistant Engineer
No 3 Sub-
Sahlasbur

M. Srinivasan
23/4/31
Engineer

21/4/31

30/4/31

SUPERINTENDING ENGINEER
SHIMOGA CIRCLE.

the Special Establishment employed in
Holisakawana Temple at Halebidu for the quarter ending 11/3
arch 31-

Q. Works.	a. Dimensions ordered		Total	Rate	Cost
		and		stones from	
Removing, raising by or resetting the floor - Big Vandy Mantap	1	10 1/2 8	84		
	1	30 6	180		
	1	18 5 3/4	104		
	1	5 3 1/2	18		
	1	10 5 1/2	55		
Raised platform.	1	80 4	320		
	1	11 5 1/2	61		
	1	18 7	126		
	1	15 5	75		
	1	13 1/2 3	41		
	1	7 3	21		
	1	10 1/2 3	3		
	1	13 1/2 3	41		
	1	10 1/2 2 1/2	26		
Steps	1	9 8	72		
At front Small Vandy	1	72 5	360		
Total			1616	gms 16.16	15 - - 242
Cement pointing - Big Vandy Mantap	1	10 1/2 8	84		
	1	30 6	180		
	1	18 5 3/4	104		
	1	5 3 1/2	18		
	1	10 5 1/2	55		
Around Vandy	1	25 3	75		
Raised platform	1	80 4	320		
Total			8.35	" 8.35	5 - 41
3) Fine Cement Towards South side inside	2	200 gms	400	" 4.00	8 -
in the Carthick Potharann					

overalls	3	10	220	19m. 3.20				
5) Carrying & fixing a Soparann bone on the Carlike Soparann	1	1	60	1	5			
6) Karasas Over Carlike Soparann. Triped in Cement	12	12		12	2	8		
7) Repairing the big and damaged Soryamaryana Vigraha in big Nandy Mantap	1	1		1	50			5
8) Receiving a stone big pillar & keep it on one side in big Nandy Mantap	1	1		1	4			
9) Preparing & fixing new Cornice stones On Sri Chakra. $(1 \times 1\frac{1}{2}) + (1 \times 3) =$		4 1/2	Rft	4 1/2	1	8		
10) Preparing new Cornice stones. For Sri Chakra. $(1 \times 7\frac{1}{2}) + (1 \times 3\frac{1}{2}) + (1 \times 2\frac{1}{2}) + (1 \times 3\frac{3}{4}) + (1 \times 2) + (1 \times 1\frac{1}{4}) + (1 \times 2\frac{3}{4}) + (1 \times 5\frac{1}{2}) = 28\frac{3}{4}$				29	1			2
Collecting sand by carrying from about 1/2 a mile distance. by coolies. 10 coolies	10	10	10	10	1			16
Total progress towards								470

Actual amount spent on the works.

Non recurring Establishment Charges for January	123.
" " February	108
" " March	106
Total Rupees =	337

Cost of 10 Cement-bags issued to work on 4/14/-

Total Amount Spent.	386.
---------------------	------

344/37

SUPERINTENDING ENGINEER
SHIMOGA CIRCLE.

Sd/- M. Madhavan
17/4/31
Asst Engineer
203 Sub Division

M. K. Srinivasan
Executive Engineer, 22/4/31
Hassan Division

(66)

No. 3/8/
ENCLS. 1 su

Public Works Department.

Central Office.

Dated, Bangalore, 11/9/1931

Mag 431-28-14

FROM

The Chief Engineer of Mysore,
Bangalore.

To

The Financial Secretary to Government,
Bangalore.

Sir,

Renovation of Sri Hoisaleswara Temple at Halebid.

I have the honour to forward herewith a copy of the progress^d report on the above work for the quarter ended 30th June 1931, receive from the Superintending Engineer, Shimoga Circle.

Similar report relating to Sri Chennakesava Temple at Belur is promised to be submitted shortly by the Superintending^{Engineer} and will be forwarded on receipt.

I have the honour to be,

Sir,

Your most obedient servant,

CHIEF ENGINEER OF MYSORE.

10/9/31

N.J.P.

No. 4278

May 431 28-181

(97)

MYSORE PUBLIC WORKS DEPARTMENT,
CENTRAL OFFICE,

Encl. 1 statement.
1 narrative report.

Dated Bangalore,..... 6..... 10..... 1931


[Handwritten signature]

FROM

The Chief Engineer of Mysore,
Bangalore.

TO

The Financial Secretary to
Government,
Bangalore.



SIR,

SRIE CHENNALESASWAMI TEMPLE AT BELUR.

In continuation of this office letter No. 3131 dated the 11th September 1931, I have the honour to forward herewith, for information, a copy of the Progress Report on the above work, together with a narrative report, for the quarter ending 30th June 1931, received from the superintending Engineer, Shimoga Circle.

I have the honour to be,

Sir,

Your most obedient servant,

M. Nanjappa

CHIEF ENGINEER OF MYSORE.

6/10/31

V.J.P.

Narrative report on the progress secured in the works of Sri Channakeswaswamy temple at Belur during the quarter ended the 30th June 31.

(25)
1. Resetting the slabbed floor within the compound of the temple.

In some portions, the slabs were so unevenly set that the slope was not adequate and in consequence the drainage was not effective and water stagnated in the hollow portions. Such unevenness is being removed by resetting the slabs to proper slope and the quantity so worked out during the quarter is about 3.00 sqrs.

2. Cement pointing to the slabbed floor of the compound. The - - flooring slabs reset all round the platform of the main temple or Srichakra was also pointed with cement and the work turned out was nearly $18\frac{1}{2}$ squares.

3. Cement pointing to the joints of the outer walls of the main temple.

The joints of the walls without cement materials were liable for the accumulation of dirt and moisture and caused small plants to take root within the crevices and grow. To remedy this, the joints are being pointed, also with cement and the quantity of - work done in the quarter is about 18.00 squares.

4. Providing slabbed parapet walls in front of Vahanamantapam.

Improvements to this mantapam are being effected and among the same, the construction of parapets with newly dressed and - carved soap stone is prominent, so as to present a neat appearance in keeping with the surroundings of the building.

5. Cleaning Kuppe Channigaraya temple. - The pillars, Gopurams and other carvings have been coated with white wash and present a dirty appearance and as the same is pretty thick and hardened, being treated with washes of ages in succession, it takes a very long time to remove this coat from the stones etc., treated and much labour is also necessary to be engaged in this work. A - -

was made in this direction and about 10 squares of the whitewash has been removed during the quarter.

6. General improvements effected. In addition to the above items of work, the special staff employed on the repair works of the temple attended to the routine work of cleaning the images and walls and oiling the images. The masons were also employed in the reconstruction of certain parapet walls over some of the mantapams and rectifying the mutilated portions of images.

Sd. M.A.Srinivasachari,

Ex: Engineer,
Hassan Division.

" C O P Y "

[Signature]
27/4/37

Superintending Engineer,
SHIMOGA CIRCLE.

O.M.S.

[Signature]

ort on the Renovation work of
Keshava Swwamy temple at Belur for the

ending 30-6-1931

Description of Work.	No	Dimensions	Contents	Per	Total	Rate	Cost
Vahana Mantap: —							
ione in mud founda-	2	9 ³ / ₄ 2 ¹ / ₂	1	49 cft	49	- 6 -	18/-
setting thick Stone Steps.	1	10 11 ¹ / ₄	-	112 Sqr	1.12	12 - -	13/-
ressing thick Stone slabs	2	9 ¹ / ₂ 2 ¹ / ₂	-	47			
	2	9 ¹ / ₂ 2	-	38			
	2	11 ¹ / ₂ 1	-	23			
	2	9 2 ¹ / ₄	-	40			
	2	9 ¹ / ₂ 2 ³ / ₄	-	52			
Total				200 sft	200	- 4 -	50/-
ressing Cornice with flowers	2	12 ¹ / ₂	-	25			
	2	12	-	24			
	2	12	-	24			
Total				73 sft	73	2 - -	98/-
After deducting 48/- of the last quarter.							
unstructing the above in cement.	2	50	-	100 cft	100	- 6 -	38/-
Kappe Chennigaraya Swwamy temple: —							
leaning the lime wash etc							
in the Car like gopurams inside	2	2 Sqr		4.00			
—oo— Circular pillars	4	6 4 ¹ / ₂		1.08			
—oo— walls —	1	14 9		1.26			
Total				6.34 Sqr	6.34	10 - -	63/-
Open Yard: —							
Resetting floor in front of							
Vahana Mantap	1	100 30	-	3000 ..	30.00	10 - -	300/-
Painting Ammanavara	1	11 ¹ / ₂ 3	-	35			
Temple	1	35 13	-	455			
	1	13 9	-	117			
Side —oo—	1	30 10	-	300			
	1	18 11	-	198			
Total				1105 ..	11.05	5 - -	55/-
Cement Pointing the image walls							
from the water spent to Swar-							
gada bagil	1	100 18	-	1800 ..	18.00	6 - -	108/-
Total							743/-

1	_____	_____	_____	_____	_____	_____	_____	_____	_____
2)	_____	Do	_____	_____	May	_____	_____	_____	_____
3)	_____	Do	_____	_____	June	_____	_____	179	_____
4)	Purchase of Things on 23-4-1931 (Vide P.B Book 2026)	_____	_____	_____	_____	_____	_____	2	_____
5	_____	Do	_____	26-4-1931	_____	Do	_____	1	_____
6	N. Roll Charges of 9-7-1931 (Vide Page 15 of Book 2026)	_____	_____	_____	_____	_____	_____	7	8
7	Cart hire of	_____	Do	_____	_____	Do	_____	4	_____
8	Supply of Soap Stone	_____	_____	_____	_____	_____	_____	8	_____
9	Supply of Sand	_____	_____	_____	_____	_____	_____	8	8
10	Cost of 16 Cement bags issued to work.	_____	_____	_____	_____	_____	_____	65	_____
Total Expenditure Rupees								53	_____

(Sd) R Madhavan
Asst Engineer
NO 3 Sub Div

M. S. Srinivasan
Executive Engineer,
Hassan Division.

29/8/31
29/8/31

**SUPERINTENDING ENGINEER.,
SHIMOGA CIRCLE.**